

UPad Smart Commercial Tablet

Accessory Guide

One Tablet. Multiple Setups. Built for Your Workflow.

From handheld to countertop and wall-mounted configurations, UROVO UPad adapts to different store environments and work scenarios with flexible mounting and accessory options, helping frontline teams work efficiently wherever they are.

Power & Charging

Standard

Adapter & USB Cable

- Input: 100–240 V AC, 50/60 Hz, 0.5 A
- Output: 12 V DC ⎓ 1.5 A (18 W) / 9 V DC ⎓ 2 A (18 W) / 5 V DC ⎓ 3 A (15 W)
- Adapter plug type varies by region
- Port: USB Type-C





Power & Charging

Standard

Standard Battery Service-Replaceable

- Nominal voltage: 3.87V
- Typical capacity: 8000mAh



*Actual accessory appearance is subject to the final production version.

Protection & Carrying

Optional

Rugged Case

- Material: TPU (black) + PC (transparent)
- Included Accessories: 2 × wrist straps
- Drop Protection: Withstands drops from up to 1.2 m



Protection & Carrying

Optional

Shoulder Strap

- Adjustable Length: 90–180 cm
- Compatibility: Must be used with the rugged case.



*Actual accessory appearance is subject to the final production version.

Power & Charging

Optional

Magnetic Charging Dock

- Attachment: Magnetic attachment design
- Charging Interface: USB
- Power Adapter: Plug type varies by region
- Compatibility: Charges the UPad with or without the rugged case installed, providing flexible everyday use.



Protection & Carrying

Optional

Glass Film

- Tempered Glass Screen Protector

*Actual accessory appearance is subject to the final production version.

Docks & Workstation Solutions

Optional

Magnetic Docking Station



*UPad Tablet Sold Separately

Flexible Viewing Angles
75°–145° flip design supports flexible screen adjustment and vertical mounting.

Dual-Mode Operation
Flip the screen toward customers for self-service or toward staff for assisted checkout.

Innovative Magnetic Locking Design
Magnetic alignment and rear locking mechanism ensure quick attachment, secure mounting, and easy switching between docked and handheld use.

Expanded Peripheral Connectivity
USB-A and USB-C ports enable direct peripheral connections for a complete workstation setup.

Stable Wired Connectivity
Built-in LAN port provides reliable network access for busy retail and restaurant environments.

Durable, Modular Design
Premium metallic finish and modular design support flexible accessory combinations for diverse deployment scenarios.

*Actual accessory appearance is subject to the final production version.

Specifications

- Mounting: Magnetic mounting; two rear screw holes for secure, fixed installation
- Interfaces: 2 × USB-A, 1 × USB-C, 1 × USB-C DC input (9 V ⎓ 2 A)
- Network: Wired Ethernet port
- Operating Temperature: 0°C to 55°C
- Power Input: 100–240 V AC
- Power Output: 9 V ⎓ 2 A (USB-C QC); supports PD 9 V ⎓ 2.25 A / 20 V ⎓ 1.65 A

Applications



*Actual accessory appearance is subject to the final production version.

Docks & Workstation Solutions

Optional

Ustation Max





*UPad Tablet Sold Separately

Built-in Thermal Printer
Eliminates the need for a separate receipt printer, saving counter space and reducing cable clutter.

Comprehensive Peripheral Connectivity
Multiple interfaces support barcode scanners, mice, keyboards, cash drawers, and networked payment systems.

Durable, Modular Design
Premium metallic finish and flexible accessory combinations suit diverse scenarios.

Flexible Screen Rotation
The main screen rotates from 65° to 115°, allowing flexible viewing angles for both staff and customers.

Magnetic Quick-Release Mounting
Enables quick docking and undocking of the tablet for flexible counter configurations.

*Actual accessory appearance is subject to the final production version.

Specifications

- Power Adapter: Input: 100–240 V AC, 1.7 A; Output: 24 V DC, 3 A
- Display Adjustment: Main display supports 65° –115° rotation; secondary display is fixed
- Built-in Printer: 58/80mm thermal printer with automatic cutter; print speed up to 250 mm/s; supports paper rolls with an outer diameter of up to 80 mm
- Interfaces: 1 × 4-pin aviation connector, 2 × USB-A 3.0, 1 × USB-C 3.0 (DP), 1 × RJ45, 1 × RJ12, 1 × COM serial port, 1 × Micro-USB Debug port
- Operating Temperature: 0° C to 55° C
- Optional Accessory: Cash drawer support for a complete all-in-one POS station

Applications




*Actual accessory appearance is subject to the final production version.

Mounting Accessories

Optional

Mount Adapter



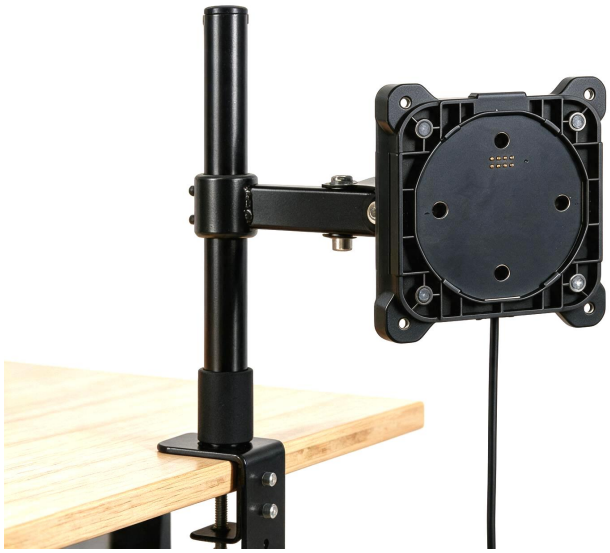

*UPad Tablet Sold Separately

Seamless Power Connection
Pogo-pin charging on the back of the tablet enables a clean, cable-free connection.

Space-Saving Wall Mounting
Frees up valuable counter space and keeps essential services within easy reach.

Flexible Mounting Options
Compatible with VESA 75 × 75 mm patterns and standard 86 × 86 mm electrical boxes for versatile installation.


Versatile Application Scenarios
Ideal for self-service ordering, employee check-in, RFID price checks, and other everyday store workflows.

*Actual accessory appearance is subject to the final production version.

Specifications

- Dimensions (L × W × H): 102.5 × 100 × 19.2 mm
- Mounting Options: Supports VESA 75 × 75 mm mounting patterns or standard 86 × 86 mm electrical boxes
- Power Supply: Powers the tablet via the pogo pins on the back of the device

Applications

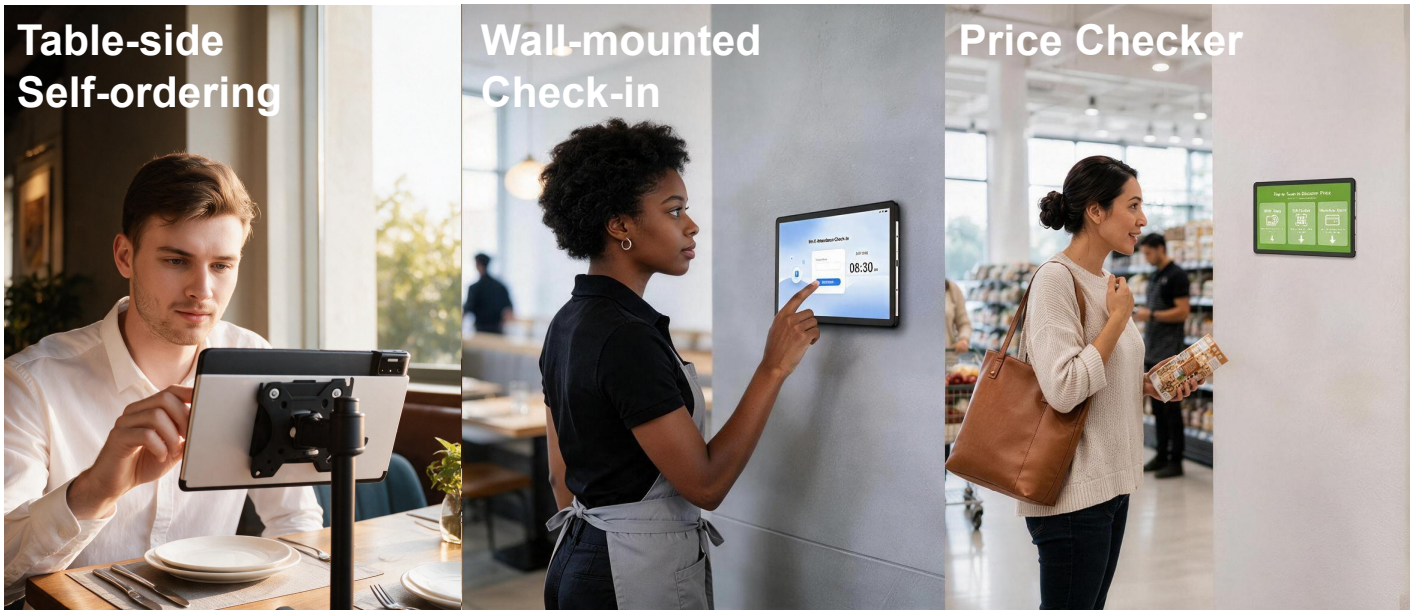

UROVO PTE. LIMITED

Website: en.urovo.com Email: urovo@urovo.com

Address: 1 Raffles Place, #21-01 One Raffles Place Tower 1, Singapore 048616

UROVO Europe

Website: en.urovo.com

Address: de Maas 9, 5684PL, Best, the Netherlands

UROVO North America

Website: us.urovo.com

Address: 5319 UNIVERSITY DR STE 367 IRVINE, CA 92612